



Xtreme® Airless Sprayers

The Latest in High-Performance, High-Pressure Technology



PROVEN QUALITY. LEADING TECHNOLOGY.

Xtreme Sprayers with NXT® Technology

Discover the Next Generation of Xtreme Power and Performance

NXT Air Motor Technology lasts up to 10 times longer!

We've taken the best and made it even better. With the Xtreme NXT, you get a new airless sprayer that sets a higher standard for long-lasting durability. In fact, the NXT Air Motor is proven to last 10 times longer than its predecessor, the Graco King™. Built to handle the toughest protective coatings and corrosion control applications, the Xtreme NXT also provides easy access to the modular air valve, a de-icing feature and reduced noise. And with more models and configurations to choose from, you get the precise pressure and output you need for your high performance coatings spraying applications.

NXT Air Motor

- Modular design for easier maintenance
- Rugged body armor won't rust or dent
- Highest technology air motor on the market

DataTrak® Control

- Runaway protection
- Pump diagnostics
- Material usage
- Optional accessory



Modular Air Valve

- De-ice control reduces icing
- Up to 50% quieter than previous models
- Modular air valve
 - Reduces stalling
 - Easy-to-repair




Quick Disconnect

- Makes for easier service

Graco Xtreme Pump Lower with Built-In Filter

- Lower cost of ownership
- Longer-lasting rod with Chromex™ coating
- Quick knockdown

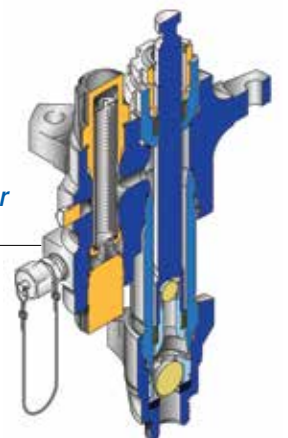

The Rules Have Changed

Raising the Bar for High-Performance Airless Spraying

Reliability. Durability. More Choices.

Xtreme Sprayers... choose the package that fits your demanding spraying applications.



Zinc Xtreme Package with Circulation and Heavy-Duty Cart



Xtreme Sprayer with Lightweight Cart




Xtreme Sprayer with Hopper Feed Kit and Heavy-Duty Cart



Less pulsation for better results


Xtreme NXT technology provides a smooth, rapid changeover for a better, more consistent finish and less user fatigue.

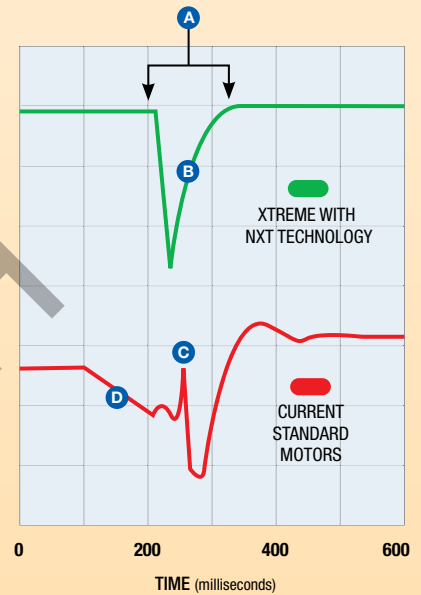

- A** Less than $\frac{1}{15}$ of a second changeover!
- B** Quick changeover and recovery with less pulsation
- C** Pressure spike at changeover
- D** Longer changeover causing pulsation

Noise-reduction technology

The quiet, low-noise NXT air motor operates around 87 decibels, while other comparable motors operate up to 103 dB(A).

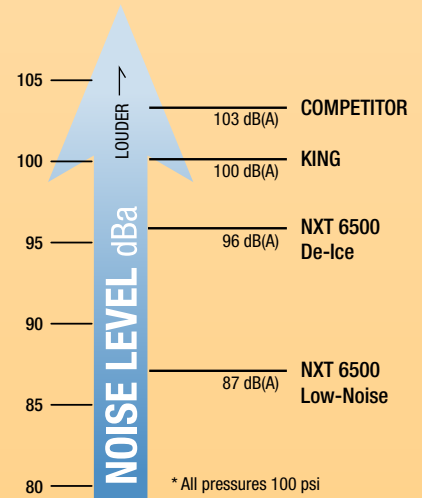

Selecting the Right Xtreme Sprayer

Three air motor sizes and 12 models to fit all your demanding applications

PACKAGES

X X X X X X

Product Identifier:
X=Xtreme Sprayer

Package Ratio:

- 25: 3400cc motor/290cc lower
- 30: 3400cc motor/220cc lower
- 35: 2200cc motor/115cc lower
- 40: 3400cc motor/180cc lower
- 45: 6500cc motor/290cc lower
- 46: 3400cc motor/145cc lower
- 50: 6500cc motor/250cc lower
- 55: 3400cc motor/115cc lower
- 60: 6500cc motor/220cc lower
- 70: 6500cc motor/180cc lower
- 80: 3400cc motor / 85cc lower
- 90: 6500cc motor/145cc lower

Motor Type:

- D: De-icing
- L: Low noise

Mount Type:

- H: Heavy-duty cart
- L: Lightweight cart
- W: Wall-mount

Package/DataTrak™:

- 1: Complete package with DataTrak
- 2: Bare package with DataTrak
- 3: Complete package, no DataTrak
- 4: Bare package, no DataTrak
- 5: Complete hopper package with DataTrak
- 6: Complete hopper package, no DataTrak
- 7: Complete package, no DataTrak, no built-in fluid filter*

Example:

X46DH2 is a 46:1, De-Ice, heavy-duty, bare package with DataTrak

Notes: Packages sold with XSeal_LTH packings only. Packages sold with built-in filter only. Complete packages sold with XTR™ gun, 50 ft x 3/8 hose and 6 ft x 1/4 whip hose. Wall-mount packages are only available bare, but include 10 ft suction hose with 55 gal suction tube.

* Only available on X45, X60 or X70 De-ice, heavy-duty or lightweight cart packages.

PUMPS

P X X X C X

Product Identifier:
P=Xtreme Pump

Pump Ratio:

- 25: 3400cc motor/290cc lower
- 30: 3400cc motor/220cc lower
- 35: 2200cc motor/115cc lower
- 40: 3400cc motor/180cc lower
- 45: 6500cc motor/290cc lower
- 46: 3400cc motor/145cc lower
- 50: 6500cc motor/250cc lower
- 55: 3400cc motor/115cc lower
- 60: 6500cc motor/220cc lower
- 70: 6500cc motor/180cc lower
- 80: 3400cc motor / 85cc lower
- 90: 6500cc motor/145cc lower

Motor/DataTrak:

- D: De-icing: None
- E: De-icing: DataTrak
- L: Low noise: None
- M: Low noise: DataTrak

Lower Material:

- C: Carbon steel

Filter/Air Controls:

- 1: No built-in filter, no air controls
- 2: Built-in filter, no air controls
- 3: No built-in filter, air controls
- 4: Built-in filter, air controls

Example:

P70DC2 is a 70:1 De-Ice, with built-in filter and no air control

Note: Pumps sold with XSeal_LTH packings only.

| XTREME SPRAYER SPECIFICATIONS | X25 | X30 | X35 | X40 | X45 | X46 | X50 | X55 | X60 | X70 | X80 | X90 |
|--|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Output per cycle | 290cc | 220cc | 115cc | 180cc | 290cc | 145cc | 250cc | 115cc | 220cc | 180cc | 85cc | 145cc |
| Motor Size | NXT 3400 | NXT 3400 | NXT 2200 | NXT 3400 | NXT 6500 | NXT 3400 | NXT 6500 | NXT 3400 | NXT 6500 | NXT 6500 | NXT 3400 | NXT 6500 |
| Maximum Working Pressure psi (bar, MPa) | 2375 (164, 16.4) | 3150 (217, 21.7) | 3800 (262, 26.2) | 3800 (262, 26.2) | 4550 (313, 31.3) | 4750 (327, 32.7) | 5200 (359, 35.9) | 5950 (410, 41.0) | 6000 (417, 41.7) | 7250 (500, 50.0) | 7250 (500, 50.0) | 7250 (500, 50.0) |
| Maximum Air Input Pressure psi (bar, MPa) | 100 (7, 0.7) | 100 (7, 0.7) | 100 (7, 0.7) | 100 (7, 0.7) | 100 (7, 0.7) | 100 (7, 0.7) | 100 (7, 0.7) | 100 (7, 0.7) | 100 (7, 0.7) | 100 (7, 0.7) | 100 (7, 0.7) | 80 (5.5, .55) |
| Maximum Free Flow Output gpm (lpm) | 13.8 (52.2) | 10.0 (38) | 6.0 (22.7) | 8.5 (32) | 13.8 (52.2) | 7.5 (28) | 11.3 (43) | 6.0 (22.7) | 10.0 (38) | 8.5 (32) | 4.5 (17) | 7.5 (28) |
| Output at 60 CPM gpm (lpm) | 4.6 (17) | 3.4 (12.9) | 2.0 (7.6) | 2.9 (11) | 4.6 (17) | 2.3 (8.7) | 4.0 (15.2) | 2.0 (7.6) | 3.4 (12.9) | 2.9 (11) | 1.5 (5.7) | 2.3 (8.7) |

| SPRAYER | MOTOR TYPE | MOUNT TYPE | DATATRAK INCLUDED | PACKAGE | X25 | X30 | X35 | X40 | X45 | X46 | X50 | X55 | X60 | X70 | X80 | X90 | |
|-------------|------------|------------|-------------------|---------|----------|--------|-------------|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | | | | | COMPLETE | BARE | WITH HOPPER | WALL-MOUNT | | | | | | | | | |
| COMPLETE | D | H | YES | C | X25DH1 | X30DH1 | X35DH1 | X40DH1 | X45DH1 | X46DH1 | X50DH1 | X55DH1 | X60DH1 | X70DH1 | X80DH1 | X90DH1 | |
| | D | H | NO | C | X25DH3 | X30DH3 | X35DH3 | X40DH3 | X45DH3 | X46DH3 | X50DH3 | X55DH3 | X60DH3 | X70DH3 | X80DH3 | X90DH3 | |
| | D | L | YES | C | X25DL1 | X30DL1 | X35DL1 | X40DL1 | X45DL1 | X46DL1 | X50DL1 | X55DL1 | X60DL1 | X70DL1 | X80DL1 | X90DL1 | |
| | D | L | NO | C | X25DL3 | X30DL3 | X35DL3 | X40DL3 | X45DL3 | X46DL3 | X50DL3 | X55DL3 | X60DL3 | X70DL3 | X80DL3 | X90DL3 | |
| | L | H | YES | C | | | | | X45LH1 | | X50LH1 | | X60LH1 | X70LH1 | | X90LH1 | |
| | L | H | NO | C | | | | | X45LH3 | | X50LH3 | | X60LH3 | X70LH3 | | X90LH3 | |
| | L | L | YES | C | | | | | X45LL1 | | X50LL1 | | X60LL1 | X70LL1 | | X90LL1 | |
| | L | L | NO | C | | | | | X45LL3 | | X50LL3 | | X60LL3 | X70LL3 | | X90LL3 | |
| | BARE | D | H | YES | B | X25DH2 | X30DH2 | X35DH2 | X40DH2 | X45DH2 | X46DH2 | X50DH2 | X55DH2 | X60DH2 | X70DH2 | X80DH2 | X90DH2 |
| | | D | H | NO | B | X25DH4 | X30DH4 | X35DH4 | X40DH4 | X45DH4 | X46DH4 | X50DH4 | X55DH4 | X60DH4 | X70DH4 | X80DH4 | X90DH4 |
| | | D | L | YES | B | X25DL2 | X30DL2 | X35DL2 | X40DL2 | X45DL2 | X46DL2 | X50DL2 | X55DL2 | X60DL2 | X70DL2 | X80DL2 | X90DL2 |
| | | D | L | NO | B | X25DL4 | X30DL4 | X35DL4 | X40DL4 | X45DL4 | X46DL4 | X50DL4 | X55DL4 | X60DL4 | X70DL4 | X80DL4 | X90DL4 |
| L | | H | YES | B | | | | | X45LH2 | | X50LH2 | | X60LH2 | X70LH2 | | X90LH2 | |
| L | | H | NO | B | | | | | X45LH4 | | X50LH4 | | X60LH4 | X70LH4 | | X90LH4 | |
| L | | L | YES | B | | | | | X45LL2 | | X50LL2 | | X60LL2 | X70LL2 | | X90LL2 | |
| L | | L | NO | B | | | | | X45LL4 | | X50LL4 | | X60LL4 | X70LL4 | | X90LL4 | |
| WITH HOPPER | | D | H | YES | C | X25DH5 | X30DH5 | X35DH5 | X40DH5 | X45DH5 | X46DH5 | X50DH5 | X55DH5 | X60DH5 | X70DH5 | X80DH5 | X90DH5 |
| | | D | H | NO | C | X25DH6 | X30DH6 | X35DH6 | X40DH6 | X45DH6 | X46DH6 | X50DH6 | X55DH6 | X60DH6 | X70DH6 | X80DH6 | X90DH6 |
| | | D | L | YES | C | X25DL5 | X30DL5 | X35DL5 | X40DL5 | X45DL5 | X46DL5 | X50DL5 | X55DL5 | X60DL5 | X70DL5 | X80DL5 | X90DL5 |
| | | D | L | NO | C | X25DL6 | X30DL6 | X35DL6 | X40DL6 | X45DL6 | X46DL6 | X50DL6 | X55DL6 | X60DL6 | X70DL6 | X80DL6 | X90DL6 |
| | L | H | YES | C | | | | | X45LH5 | | X50LH5 | | X60LH5 | X70LH5 | | X90LH5 | |
| | L | H | NO | C | | | | | X45LH6 | | X50LH6 | | X60LH6 | X70LH6 | | X90LH6 | |
| | L | L | YES | C | | | | | X45LL5 | | X50LL5 | | X60LL5 | X70LL5 | | X90LL5 | |
| | L | L | NO | C | | | | | X45LL6 | | X50LL6 | | X60LL6 | X70LL6 | | X90LL6 | |
| | WALL-MOUNT | D | W | YES | B | X25DW2 | X30DW2 | X35DW2 | X40DW2 | X45DW2 | X46DW2 | X50DW2 | X55DW2 | X60DW2 | X70DW2 | X80DW2 | X90DW2 |
| | | D | W | NO | B | X25DW4 | X30DW4 | X35DW4 | X40DW4 | X45DW4 | X46DW4 | X50DW4 | X55DW4 | X60DW4 | X70DW4 | X80DW4 | X90DW4 |
| | | L | W | YES | B | | | | | X45LW2 | | X50LW2 | | X60LW2 | X70LW2 | | X90LW2 |
| | | L | W | NO | B | | | | | X45LW4 | | X50LW4 | | X60LW4 | X70LW4 | | X90LW4 |

| PUMPS | MOTOR TYPE | BUILT-IN FILTER | DATATRAK INCLUDED | AIR CONTROLS | X25 | X30 | X35 | X40 | X45 | X46 | X50 | X55 | X60 | X70 | X80 | X90 |
|-------|------------|-----------------|-------------------|--------------|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | | | | | BARE | | | | | | | | | | | |
| BARE | D | YES | NO | NO | NA | P30DC2 | P35DC2 | P40DC2 | P45DC2 | P46DC2 | P50DC2 | P55DC2 | P60DC2 | P70DC2 | P80DC2 | P90DC2 |
| | D | YES | NO | YES | NA | P30DC4 | P35DC4 | P40DC4 | P45DC4 | P46DC4 | P50DC4 | P55DC4 | P60DC4 | P70DC4 | P80DC4 | P90DC4 |
| | D | YES | YES | NO | NA | P30EC2 | P35EC2 | P40EC2 | P45EC2 | P46EC2 | P50EC2 | P55EC2 | P60EC2 | P70EC2 | P80EC2 | P90EC2 |
| | D | YES | YES | YES | NA | P30EC4 | P35EC4 | P40EC4 | P45EC4 | P46EC4 | P50EC4 | P55EC4 | P60EC4 | P70EC4 | P80EC4 | P90EC4 |
| | D | NO | NO | NO | NA | P30DC1 | P35DC1 | P40DC1 | P45DC1 | P46DC1 | P50DC1 | P55DC1 | P60DC1 | P70DC1 | P80DC1 | P90DC1 |
| | D | NO | NO | YES | NA | P30DC3 | P35DC3 | P40DC3 | P45DC3 | P46DC3 | P50DC3 | P55DC3 | P60DC3 | P70DC3 | P80DC3 | P90DC3 |
| | D | NO | YES | NO | NA | P30EC1 | P35EC1 | P40EC1 | P45EC1 | P46EC1 | P50EC1 | P55EC1 | P60EC1 | P70EC1 | P80EC1 | P90EC1 |
| | D | NO | YES | YES | NA | P30EC3 | P35EC3 | P40EC3 | P45EC3 | P46EC3 | P50EC3 | P55EC3 | P60EC3 | P70EC3 | P80EC3 | P90EC3 |
| | L | YES | NO | NO | NA | P30LC2 | P35LC2 | P40LC2 | P45LC2 | P46LC2 | P50LC2 | P55LC2 | P60LC2 | P70LC2 | P80LC2 | P90LC2 |
| | L | YES | NO | YES | NA | P30LC4 | P35LC4 | P40LC4 | P45LC4 | P46LC4 | P50LC4 | P55LC4 | P60LC4 | P70LC4 | P80LC4 | P90LC4 |
| | L | YES | YES | NO | NA | P30MC2 | P35MC2 | P40MC2 | P45MC2 | P46MC2 | P50MC2 | P55MC2 | P60MC2 | P70MC2 | P80MC2 | P90MC2 |
| | L | YES | YES | YES | NA | P30MC4 | P35MC4 | P40MC4 | P45MC4 | P46MC4 | P50MC4 | P55MC4 | P60MC4 | P70MC4 | P80MC4 | P90MC4 |
| | L | NO | NO | NO | NA | P30LC1 | P35LC1 | P40LC1 | P45LC1 | P46LC1 | P50LC1 | P55LC1 | P60LC1 | P70LC1 | P80LC1 | P90LC1 |
| | L | NO | NO | YES | NA | P30LC3 | P35LC3 | P40LC3 | P45LC3 | P46LC3 | P50LC3 | P55LC3 | P60LC3 | P70LC3 | P80LC3 | P90LC3 |
| | L | NO | YES | NO | NA | P30MC1 | P35MC1 | P40MC1 | P45MC1 | P46MC1 | P50MC1 | P55MC1 | P60MC1 | P70MC1 | P80MC1 | P90MC1 |
| | L | NO | YES | YES | NA | P30MC3 | P35MC3 | P40MC3 | P45MC3 | P46MC3 | P50MC3 | P55MC3 | P60MC3 | P70MC3 | P80MC3 | P90MC3 |

LEGEND: Motor Type: D=De-Ice, L=Low-Noise Mount Type: H=Heavy-Duty Cart, L=Lightweight Cart, W=Wall Mount Package: C=Complete Hose & Gun, B=Bare

Ordering Information & Accessories

To get genuine Graco accessories, see your nearest Graco Distributor, or call Graco at 877-844-7226.

NXT Package Configurations

| | | | |
|--------|--|--------|--|
| 287978 | 40:1 with External Filter Wall Mount Package with Low Noise NXT Air Motor with DataTrak | 287979 | 23:1 Dura-Flo Sprayer Bare with De-Icing NXT Air Motor |
| 287975 | 30:1 Heavy-Duty Cart AA Package (G40 Spray Gun and Hoses) with De-Icing NXT Air Motor with DataTrak | 287981 | 32:1 Dura-Flo Sprayer Package (Silver Spray Gun and Hoses) with De-Icing NXT Air Motor |
| 287976 | 40:1 Heavy-Duty Cart AA Package (G40 Spray Gun and Hoses) with De-Icing NXT Air Motor with DataTrak | XN3DH2 | NXT 3400 De-Icing with DataTrak on a Bare Heavy Duty-Cart * |
| 287971 | 25:1 Heavy-Duty Cart Zinc Package, no hose or gun, with De-Icing NXT Air Motor | XN3DH4 | NXT 3400 De-Icing on a Bare Heavy-Duty Cart * |
| 287972 | 40:1 Heavy-Duty Cart Zinc Package, no hose or gun, with De-Icing NXT Air Motor | XN3DL2 | NXT 3400 De-Icing with DataTrak on a Bare Lightweight Cart * |
| 287973 | 25:1 Heavy-Duty Cart Zinc Package (Silver Spray Gun 238591 and Hoses) with De-Icing NXT Air Motor | XN3DL4 | NXT 3400 De-Icing on a Bare Lightweight Cart * |
| 287974 | 40:1 Heavy-Duty Cart Zinc Package (Silver Spray Gun 238591 and Hoses) with De-Icing NXT Air Motor | XN6DH2 | NXT 6500 De-Icing with DataTrak on a Bare Heavy-Duty Cart * |
| 287973 | 25:1 Heavy-Duty Cart Zinc Package (Silver Spray Gun 238591 and Hoses) with De-Icing NXT Air Motor | XN6DH4 | NXT 6500 De-Icing on a Bare Heavy-Duty Cart * |
| 287974 | 40:1 Heavy-Duty Cart Zinc Package (Silver Spray Gun 238591 and Hoses) with De-Icing NXT Air Motor | XN6DL2 | NXT 6500 De-Icing with DataTrak on a Bare Lightweight Cart * |
| 287980 | 23:1 Dura-Flo Sprayer Package (Silver Spray Gun and Hoses) with De-Icing NXT Air Motor with DataTrak | XN6DL4 | NXT 6500 De-Icing on a Bare Lightweight Cart * |
| | | 247312 | Cart adapter for NXT2200 Air Motor |
| | | 287919 | Lightweight base cart |
| | | 287884 | Heavy-duty base cart |

* Add any Xtreme Lower (Sizes 145cc-290cc) to make a Package. Includes tie rods, coupling kit and a suction hose.

Xtreme Loweres

| Part # | Output per cycle (cc) | Packing | Filter | Rod | Cylinder | Rebuild Kits* |
|--------|--|----------------|----------|--------|----------|---------------|
| L085C1 | 85 | Xseal_LTH | None | 24B819 | 15F682 | 24F973 |
| L085C2 | 85 | Xseal_LTH | Built-In | 24B819 | 15F682 | 24F973 |
| L085C3 | 85 | Tuff-Stack (5) | None | 24B819 | 15F682 | 262507 |
| L085C4 | 85 | Tuff-Stack (5) | Built-In | 24B819 | 15F682 | 262507 |
| L115C1 | 115 | Xseal_LTH | None | 24B820 | 15F656 | 24F972 |
| L115C2 | 115 | Xseal_LTH | Built-In | 24B820 | 15F656 | 24F972 |
| L115C3 | 115 | Tuff-Stack (5) | None | 24B820 | 15F656 | 262508 |
| L115C4 | 115 | Tuff-Stack (5) | Built-In | 24B820 | 15F656 | 262508 |
| L145C1 | 145 | Xseal_LTH | None | 24B821 | 197315 | 24F971 |
| L145C2 | 145 | Xseal_LTH | Built-In | 24B821 | 197315 | 24F971 |
| L145C3 | 145 | Tuff-Stack (5) | None | 24B821 | 197315 | 262510 |
| L145C4 | 145 | Tuff-Stack (5) | Built-In | 24B821 | 197315 | 262510 |
| L180C1 | 180 | Xseal_LTH | None | 24B822 | 197316 | 24F969 |
| L180C2 | 180 | Xseal_LTH | Built-In | 24B822 | 197316 | 24F969 |
| L180C3 | 180 | Tuff-Stack (5) | None | 24B822 | 197316 | 24F970 |
| L180C4 | 180 | Tuff-Stack (5) | Built-In | 24B822 | 197316 | 24F970 |
| L220C1 | 220 | Xseal_LTH | None | 24B823 | 197317 | 24F967 |
| L220C2 | 220 | Xseal_LTH | Built-In | 24B823 | 197317 | 24F967 |
| L220C3 | 220 | Tuff-Stack (5) | None | 24B823 | 197317 | 24F968 |
| L220C4 | 220 | Tuff-Stack (5) | Built-In | 24B823 | 197317 | 24F968 |
| L250C1 | 250 | Xseal_LTH | None | 24B824 | 197318 | 24F965 |
| L250C2 | 250 | Xseal_LTH | Built-In | 24B824 | 197318 | 24F965 |
| L250C3 | 250 | Tuff-Stack (5) | None | 24B824 | 197318 | 24F966 |
| L250C4 | 250 | Tuff-Stack (5) | Built-In | 24B824 | 197318 | 24F966 |
| L290C1 | 290 | Xseal_LTH | None | 24B825 | 197319 | 24F963 |
| L290C2 | 290 | Xseal_LTH | Built-In | 24B825 | 197319 | 24F963 |
| L290C3 | 290 | Tuff-Stack (5) | None | 24B825 | 197319 | 24F964 |
| L290C4 | 290 | Tuff-Stack (5) | Built-In | 24B825 | 197319 | 24F964 |
| 244849 | Connection Kit. Includes tie rods and coupler to adapt Xtreme lower to King, Senator® or Bulldog® motors | | | | | |

L X X X C X

Product Identifier:
L = Xtreme Lower

Lower Volume:

085: 85cc Xtreme
115: 115cc Xtreme
145: 145cc Xtreme
180: 180cc Xtreme

220: 220cc Xtreme
250: 250cc Xtreme
290: 290cc Xtreme

Lower Material:
C: Carbon Steel

Filter/Packings:

- 1: No built-in filter with Xtreme Seal (3) Leather (2)
- 2: Built-in filter with Xtreme Seal (3) Leather (2)
- 3: No built-in filter with TuffStack (5)
- 4: Built-in filter with TuffStack (5)

Example:
L115C1 is a 115cc Xtreme lower with no built-in filter

Replacement Screen Filter Elements

| 2-Pack | 25-Pack | Description |
|--------|---------|-----------------------|
| 224458 | 238436 | 30 Mesh (595 micron) |
| 224459 | 238438 | 60 Mesh (250 micron) |
| 224468 | 238440 | 100 Mesh (149 micron) |

Filter Support

| | |
|--------|-----------------------------|
| 186075 | Poly filter support |
| 179801 | Carbon steel filter support |

Filter Cap Conversion Kit

| | |
|--------|--|
| 24F975 | (85-290cc lowers) see manual 406882 |
|--------|--|

New X-Tuff™ Repair Kits

| | | |
|--------|----------------------------------|---|
| 262789 | X-Tuff Repair Kit, 85 cc lowers | Xtreme Seal™ (UHMWPE/LTH). Good for abrasive materials. Standard in new Xtreme Sprayers. |
| 262790 | X-Tuff Repair Kit, 115 cc lowers | |
| 262791 | X-Tuff Repair Kit, 145 cc lowers | Tuff-Stack™ (PTFE). Ideal for chemical resistance and higher temperatures. Not ideal for abrasive applications. |
| 262792 | X-Tuff Repair Kit, 180 cc lowers | |
| 262793 | X-Tuff Repair Kit, 220 cc lowers | |
| 262794 | X-Tuff Repair Kit, 250 cc lowers | X-Tuff™ (UHMWPE/PTFE). Good for chemical resistance and durability in applications below 140°F (60°C). |
| 262795 | X-Tuff Repair Kit, 290 cc lowers | |

Airless Guns

XTR-5 Airless Spray Gun

Maximum working pressure: 5000 psi (345 bar, 34.5 MPa)

| | |
|--------|---|
| XTRS00 | One inch round handle, four-finger trigger, no tip |
| XTRS01 | One inch round handle, four-finger trigger, 519 flat tip |
| XTRS02 | Oval-insulated handle, four-finger trigger, 519 XHD RAC tip |
| XTRS03 | Oval-insulated handle, two-finger trigger, 519 XHD RAC tip |
| XTRS04 | One inch round handle, four-finger trigger, 519 XHD RAC tip |
| XTRS05 | One inch round handle, two-finger trigger, 519 XHD RAC tip |

XTR-7 Airless Spray Gun

Maximum working pressure: 7250 psi (500 bar, 50.0 MPa)

| | |
|--------|---|
| XTR700 | Round handle, four-finger trigger, no tip |
| XTR701 | Round handle, four-finger trigger, 519 flat tip |
| XTR702 | Oval-insulated handle, four-finger trigger, 519 XHD RAC tip |
| XTR703 | Oval-insulated handle, two-finger trigger, 519 XHD RAC tip |
| XTR704 | Round handle, four-finger trigger, 519 XHD RAC tip |
| XTR705 | Round handle, two-finger trigger, 519 XHD RAC tip |

XHF Airless Spray Gun

Maximum working pressure: 7250 psi (500 bar, 50.0 MPa)

| | |
|--------|---|
| 262854 | XHF Gun, includes XHD 429 tip (see brochure 348891) |
| 248834 | XHF Gun Swivel |

Gun Accessories


Accessories

| | |
|--------|--|
| 287450 | Two-finger Trigger Kit |
| 287449 | Four-finger Round Trigger Kit |
| 287451 | Four-finger Oval Insulation Trigger Kit |
| 246294 | 10 in (254 mm) Gun Extension, 7250 psi (500 bar, 50 MPa) |
| 246295 | 15 in (380 mm) Gun Extension, 7250 psi (500 bar, 50 MPa) |
| 246296 | 18 in (457 mm) Gun Extension, 7250 psi (500 bar, 50 MPa) |

| | |
|--------|--|
| 262826 | Gun splitter, 7250 psi (500 bar, 50 MPa) |
| 246297 | 180° spray nozzle, 7/8-14 UNC-2B, 7250 psi (500 bar, 50 MPa) |
| 248837 | Gun Repair Kit, Includes Gasket, Needle and Seat |
| 287032 | Filter, 60 Mesh |
| 287033 | Filter, 100 Mesh |
| 287034 | Filter, 60 and 100 Mesh Combination |

Xtreme-Duty High-Pressure Hoses

4500 psi 5600 psi 7250 psi

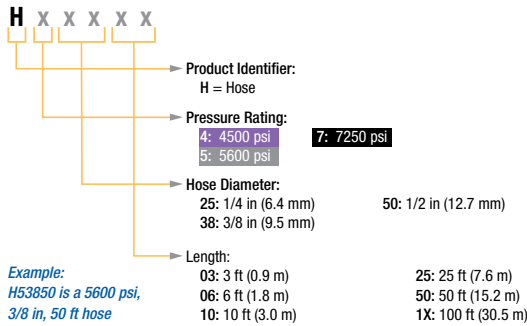

Choose the Right Hose for the Job

Working pressure 4500 psi (310 bar), 5600 psi (386 bar), or 7250 psi (500 bar)
 Temperature rating (all sizes) -40° to 180°F (-40° to 82°C)
 Chemical resistance... Hose cover resistant to a wide variety of solvents, acids and bases
 Weather resistanceHose cover has outstanding resistance to oxygen, ozone, sunlight and general weather conditions
 Electrical propertiesConductive hose

New 3/4 - Inch Hoses

| | |
|--------|--|
| H67550 | 3/4 in x 50 ft (15.2 m), 6500 psi, (448 bar, 44.8 MPa) |
| H77550 | 3/4 in x 50 ft (15.2 m), 7250 psi, (500 bar, 50.0 MPa) |

XHD™ RAC® SwitchTip

ORIFICE SIZE - INCHES

| | | .007 | .009 | .011 | .013 | .015 | .017 | .019 | .021 | .023 | .025 | .027 | .029 | .031 | .033 | .035 | .037 | .039 | .041 | .043 | .045 | .047 | .049 | .051 | .053 | .055 | .057 | .059 | .061 | .063 | .065 | .067 | .069 | .071 | .075 | .081 | | | |
|-----------|------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|--|--|
| FAN WIDTH | 2-4 (51-102) | 107 | 109 | 111 | 113 | 115 | 117 | 119 | 121 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 4-6 (102-152) | 209 | 211 | 213 | 215 | 217 | 219 | 221 | | | 225 | 227 | 229 | 231 | | 235 | | 239 | | | | | | | | | | | | | | | | | | | | | |
| | 6-8 (152-203) | 307 | 309 | 311 | 313 | 315 | 317 | 319 | 321 | 323 | 325 | 327 | 329 | 331 | 333 | 335 | 337 | 339 | 341 | 343 | 345 | 347 | | | | | 351 | | | | | | | | | | | | |
| | 8-10 (203-254) | | 409 | 411 | 413 | 415 | 417 | 419 | 421 | 423 | 425 | 427 | 429 | 431 | 433 | 435 | 437 | 439 | 441 | 443 | 445 | 447 | 449 | 451 | | 355 | | | | | | | | | | | | | |
| | 10-12 (254-305) | | 509 | 511 | 513 | 515 | 517 | 519 | 521 | 523 | 525 | 527 | 529 | 531 | 533 | 535 | 537 | 539 | 541 | 543 | 545 | 547 | 549 | 551 | 553 | 555 | 557 | | | | | | | | | | | | |
| | 12-14 (305-356) | | 609 | 611 | 613 | 615 | 617 | 619 | 621 | 623 | 625 | 627 | 629 | 631 | 633 | 635 | 637 | 639 | 641 | 643 | 645 | 647 | 649 | 651 | | 555 | 557 | 659 | | | | | | | | | | | |
| | 14-16 (356-406) | | | 711 | 713 | 715 | 717 | 719 | 721 | 723 | 725 | 727 | 729 | 731 | 733 | 735 | 737 | 739 | 741 | 743 | | 747 | 749 | 751 | 753 | 755 | | | | | | | | | | | | | |
| | 16-18 (406-457) | | | | 813 | 815 | 817 | 819 | 821 | 823 | 825 | 827 | 829 | 831 | 833 | 835 | 837 | 839 | 841 | 843 | | 847 | | 851 | | 855 | | | | | | | | | | | | | |
| | 18-20 (457-508) | | | | | | | | | | 923 | | 927 | | | 931 | 933 | 935 | 937 | 939 | | | | | | | | | | | | | | | | | | | |
| | Flow Rate (gpm) | .05 | .09 | .12 | .18 | .24 | .31 | .38 | .47 | .57 | .67 | .74 | .90 | 1.03 | 1.17 | 1.31 | 1.47 | 1.63 | 1.8 | 1.98 | 2.17 | 2.37 | 2.58 | 2.79 | 4.26 | 3.25 | 3.49 | 3.74 | 4.0 | 4.26 | 4.53 | 4.82 | 5.11 | 5.41 | 6.04 | 7.04 | | | |
| | Flow Rate (lpm) | .20 | .33 | .49 | .69 | .91 | 1.17 | 1.47 | 1.79 | 2.15 | 2.54 | 2.96 | 3.42 | 3.90 | 4.42 | 4.98 | 5.56 | 6.18 | 6.83 | 7.51 | 8.23 | 8.98 | 9.76 | 10.57 | 16.13 | 12.29 | 13.20 | 14.14 | 15.12 | 16.13 | 17.17 | 18.24 | 19.34 | 20.48 | 22.85 | 26.66 | | | |

Water @ 2000 psi (138 bar, 13.8 MPa) - paints with a higher viscosity will decrease the flow rate Example: for a tip with a .039 in orifice and a 10-in (254 mm) pattern, order XHD539

Graco XHD Guard

| | |
|--------|--|
| XHD001 | For pressures up to 7250 psi (500 bar, 50.0 MPa) |
| XHD005 | For pressures up to 7250 psi (500 bar, 50.0 MPa); for guns with 11/16 in thread |

XHD Tips

| | |
|---------|--|
| XHD ___ | Use numbers in table above to complete the part number |
| XHD003 | XHD RAC housing, SST – wrench-tight for extended life |

Xtreme NXT Spray Accessories

| Part # | Description | Part # | Description |
|--------|--|--------|---|
| 288347 | Hopper Feed Kit | NXT100 | Replacement Poppet Valve Kit |
| 255143 | Wall-Mount Bracket | 181072 | Round Suction Tube Strainer |
| 245132 | Xtreme Floor-Stand Kit | 191635 | Tube Strainer |
| NXT206 | DataTrak Upgrade Kit for the NXT 2200 | 245176 | Suction Kit, Replaces OEM Suction Assembly (6 ft, 1.8 m hose) |
| NXT306 | DataTrak Upgrade Kit for the NXT 3400 | 288687 | Suction Kit, Wall Mount Version (10 ft, 3 m hose) |
| NXT606 | DataTrak Upgrade Kit for the NXT 6500 | 245136 | 55 gal (200 l) suction tube extension, |
| NXT107 | NXT Air Motor Valve – fits all three sizes | 245190 | Inlet Ball Spring Load Kit: 145cc, 180cc |
| 262230 | External Air Controls for Lightweight Xtreme Package Carts | 245191 | Inlet Ball Spring Load Kit: 220cc, 250cc, 290cc |
| 262231 | External Air Controls for Heavy-Duty Xtreme Package Carts | 245127 | Carbide piston ball for 145 or 180 cc lower, 3-pack |
| NXT112 | De-Ice Control Knob (5-Pack) | 244841 | Lubricator – NXT Air Motor |
| NXT102 | De-Ice Control Repair Kit | 206995 | TSL, 1 qt (0.9 L) |



ABOUT GRACO

PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters
Graco N.V.
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32 89 770 700
Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500
Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Room 118 1st Floor
No.2 Xin Yuan Building
No.509 Cao Bao Road
Shanghai, 200233
The People's Republic of China
Tel: 86 21 649 50088
Fax: 86 21 649 50077

INDIA

Graco Hong Kong Ltd.
India Liaison Office
Room 432, Augusta Point
Regus Business Centre 53
Golf Course Road
Gurgaon, Haryana
India 122001
Tel: 91 124 435 4208
Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300
Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
Shinhan Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-si, Korea 431-060
Tel: 82 31 476 9400
Fax: 82 31 476 9801

SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

877-84GRACO (1-877-844-7226) or visit us at www.graco.com.

Graco Inc. is registered to I.S. EN ISO 9001

SYNTECH-SURFACE FINISHING SPECIALISTS LTD

PO BOX 19-341, 12B SAUNDERS PLACE,
AVONDALE, AUCKLAND, NEW ZEALAND

PHONE: +64 9 820 2121

FAX: +64 9 820 0101

EMAIL: sales@syntechnz.com

www.syntechnz.com

North America
Customer Service
800-328-0211
Fax 877-340-6427

